


# MAGNETIC CLAMP TMC 600

## ONE MAGNET-ENDLESS POSSIBILITIES

THE TMC 600 IS CONFIGURABLE IN MANY DIFFERENT WAYS TO SUIT YOUR APPLICATION. CONNECTION THREADS ON THE TOP AND THE EXTERNAL SIDES PROVIDE MAXIMUM VERSATILITY.

- 1 Only 2.6 kg (5.7 lbs) dead weight
- 2 Up to 600 kg (1,323 lbs) load-bearing capacity (vertically)
- 3 Easy one-handed operation

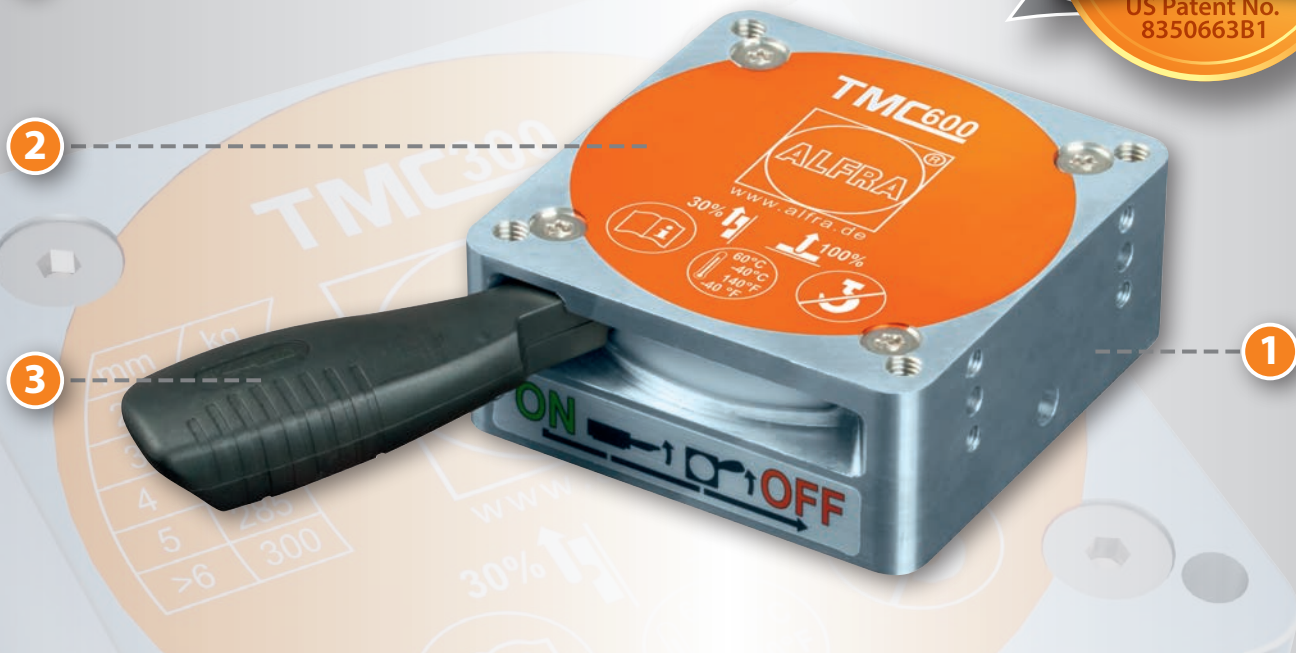

- Excellent holding force up to 600 kg (1,323 lbs) – even on a steel plate with 6 mm (1/4") thickness only
- User-friendly one-handed operation thanks to ergonomic activation lever
- Connection threads (M5 and M6) on the top and the sides of the TMC 600 allow for the easy attachment of handling accessories such as cutting guides, angle side plates, handles, and much more
- Ideal tool to ease your work, e.g. during levelling of plates, platform construction, fixation, or any kind of clamping technique!
- The specially aligned magnetic field (patented) makes welding at a distance of 15 mm (9/16") from the magnet's external side possible
- Wear-resistant magnetic contact area made of hardened steel with TiN-coating preventing damages and guaranteeing a long lifetime
- Unbelievable shear force for better hold, especially during vertical applications

#### Technical data TMC 600:

- Dead weight: 2.6 kg (5.7 lbs)
- Breakaway force: 600 kg (1,323 lbs) (on 6 mm; 1/4" steel S235)
- Length: 108 mm (4-1/4"); width: 105 mm (4-1/8"); height: 44 mm (1-3/4")

Prod.-No.

ALFRA TMC 600

41200